

PD – 330 / 2606 Series

User's Manual

Rev. B0



POSIFLEX

FCC Notes:

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions manual, may cause interference to radio communications. It has been tested and found to comply with limits for a Class A digital device pursuant to subpart J of Part 15 of FCC Rules, which are designed to provide reasonable protection against interference when operated in a commercial environment. Operation of this equipment in a residential area is likely to cause interference in which case the user at his own expense will be required to take whatever measures to correct the interference.

Warranty Limits:

Warranty terminates automatically when any person other than the authorized technicians opens the machine. The user should consult his/her dealer for the problem happened. Warranty voids if the user does not follow the instructions in application of this merchandise. The manufacturer is by no means responsible for any damage or hazard caused by improper application.

About This Manual:

Posiflex has made every effort for the accuracy of the content in this manual. However, Posiflex will assume no liability for any technical inaccuracies or editorial or other errors or omissions contained herein, nor for direct, indirect, incidental, consequential or otherwise damages, including without limitation loss of data or profits, resulting from the furnishing, performance, or use of this material.

This information is provided "as is" and Posiflex Technology, Inc. expressly disclaims any warranties, expressed, implied or statutory, including without limitation implied warranties of merchantability or fitness for particular purpose, good title and against infringement.

The information in this manual contains only essential hardware concerns for general user and is subject to change without notice. Posiflex reserves the right to alter product designs, layouts or drivers without notification. The system integrator shall provide applicative notices and arrangement for special options utilizing this product. The user may find the most up to date information of the hardware from web sites: <http://www.posiflex.com> or <http://www.posiflex.com.tw>

All data should be backed-up prior to the installation of any drive unit or storage peripheral. Posiflex will not be responsible for any loss of data resulting from the use, disuse or misuse of this or any other Posiflex product.

All rights are strictly reserved. No part of this documentation may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, or otherwise, without prior express written consent from Posiflex Technology, Inc. the publisher of this documentation.

© Copyright Posiflex Technology, Inc. 2010

All brand and product names and trademark are the property of their respective holders.

P/N: 19430902020

BRIEF INTRODUCTION

THE PRODUCT

The PD-330/ PD-2606 is a rear mount customer display designed for Posiflex XP-2000/3000 series POS terminals. It is delivered in separate carton for XP-2000/3000 series and shall be installed per instructions in this manual.

FEATURES

- LCD (Liquid crystal display) with dark blue character and yellow green back-light for PD-330
- Bright VFD (vacuum fluorescent display) with green or blue filter for PD-2606
- Two-line display with 20 characters per line
- Easy viewing characters (6.0 mm by 9.66 mm for PD-330 / 9.03 mm by 5.25 mm for PD-2606)
- Long life and trouble free operation
- Simple installation
- USB or Serial interface model
- Selectable command emulation modes including PST and EPSON command emulation modes for PD-330
- Various command emulation modes selectable by DIP switch for PD-2606
- Support 13 Code Pages of 128 characters each for PD-2606
- Support 12 international character sets of 12 characters each for PD-2606
- Supports UPOS 1.8 and WEPOS ready for PD-2606

INSTALLATION GUIDES


HOST SYSTEM PREPARAION

This adjustment must be performed by a qualified electronic technician to follow the guide from relevant technical manual. The power for the USB or Serial interface type pole display is supported through the USB or Serial connection. Please contact local dealer for more information.

INSTALLATION

To fix the rear mount upgrade kit like PD-330 or PD-2606 on the back of XP-2000/3000 series, please apply carefully the 5 small fixation shoulder screws that come along with PD-330 or PD-2606. Before fixing the upgrade kits, there is one more step required. Please release the cable exit cover as the following steps:

- A: Please find the back of cable cover just near the I/O plate.
- B: Please use the Fingertip to release compression lock located inside of back cover.
- C: after the cable cover released, please cut the circle part which show in the picture C.

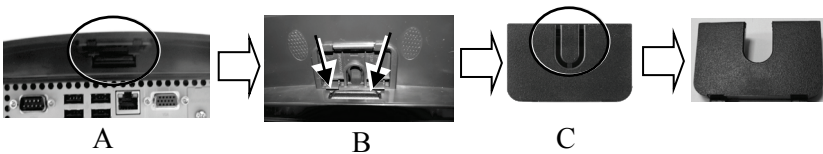

After finish this step, the cable cover can be use when the rear mount upgrade kits fixed.

In addition, please take out the bracket, screws and the main item of display from the package, and fix these items as following steps:




- A: Please take the bracket and find the side of two screws holes which with mistake-proofing holes and aim to the PD main unit.
- B: Fix the bracket and PD unit item then turn the screen face to you.
- C: Please route the PD's cable into the cannellure which is between fins and near the screw hole.
- D: Please aim the three screws holes to the back cover of XP-2000/3000 series main unit and fasten them to fix PD on the XP-2000/3000 series.

After fix the customer pole display, it may use the cable cover to manage the cable.

COMMAND EMULATION MODE SETUP (FOR PD-2606)

Now please check the back of PD-2606 display head as in the picture below. There is a small piece of plastic cover for the “DIP switch window”.

Slide the cover downward but don't pull it off otherwise you may have to practice for inserting it back. You can find 6 positions of DIP switches in this window. Adjust for the appropriate command mode used by the application program according to below table. Switch position counts from left to right and “ON” means pushed up as indicated in the right part picture below.

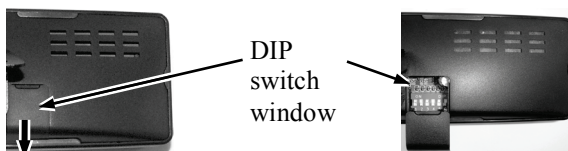

Switch Position						Command Mode
1	2	3	4	5	6	
ON	OFF	OFF	ON	OFF	OFF	ADM
ON	OFF	ON	ON	OFF	OFF	Aedex
ON	OFF	ON	OFF	OFF	OFF	Epson
ON	OFF	OFF	ON	ON	OFF	Futaba
ON	OFF	ON	OFF	ON	OFF	Noritake
ON	OFF	ON	ON	ON	OFF	UTC

The factory default command mode is set to Noritake mode for normal delivery. Please change it to Epson mode if OPOS or UPOS driver is used for the application program.

POWER ON SIGN

With interface cable connection well installed, turn on the XP-2000/3000 series terminal, a firmware identifier as power on sign will appear on the pole display screen for a while to indicate that pole display is self-tested O.K. and ready to work.

USING THE CUSTOMER DISPLAY COMMAND MODE SELECTION GUIDE

The below table provides some comparison for selection on command mode to be used in the application program for PD-2606 if it is not yet determined.

Mode	ADM	Aedex	Epson	Futaba	Noritake	UTC
Cursor	N.A.	N.A.	Invisible	Blinking Block	Blinking Block	Blinking Block (DP)
Default mode	N.A.	N.A.	Over/W	V. scroll	Over/W	PT
User defined font	N.A.	N.A.	2 chars	N.A.	2 chars	2 chars (PT)
Brightness control	NO	NO	YES	YES	YES	YES (DP)
Leading code change	NO	YES	NO	YES	YES	YES (PT)
Code page select	NO	NO	YES	YES	YES	YES
Auto scroll message	NO	NO	NO	YES	YES	YES (PT)
Timer clock	NO	NO	YES	NO	NO	YES (PT)


For PD-330 it is always the Epson command mode at power on. It can enter or exit the PST command mode through software command.

DRIVER INSTALLATION

Copy the driver and library from Posiflex Product Information CD or DVD under \Drivers\PD23_26U to your system or download from web site http://www.posiflex.com.tw/Download%20list.asp?Status=1&Series_Name=PD%20Series&Model_Name=PD-2300U. Follow instructions given in the file “README.TXT” to send commands (listed later in this manual) and data to the customer display under the programming language.

FOR OPOS APPLICATION:

Find the subfolder \Drivers\UPOS\OPOS of the Posiflex Product Information CD or DVD or download it from web site http://www.posiflex.com.tw/Download%20list.asp?Status=1&Series_Name=UPOS&Model_Name=OPOS and execute the file "SETUP.EXE" to install the OPOS Control Manager. To add the customer display under



OPOS control please set in OPOS Control Manager device name “PD3x-Line Display” in the top row.

SPECIFICATION

OPTICAL

Number of digits	20 digits/row, 2 rows
Dot matrix	5 X 7 dots
Digit height	9.66 mm (PD-330) / 9.03 mm (PD-2606)
Digit width	6.0 mm (PD-330) / 5.25 mm (PD-2606)
Display color	Dark blue (PD-330) / Green (PD-2606)

MECHANICAL

Display Head Height	57.5 mm
Display Head Width	196.6 mm
Display Head Depth	39.5 mm
Case color	Black

ELECTRICAL

Power from interface port of XP system: + 5VDC 1A max.

ENVIRONMENTAL

Operating temperature	0° to + 40°C
Storage temperature	-10° to + 60°C
Operating humidity	20% to 85%, non-condensing
Storage humidity	5% to 90%, non-condensing

WARNING: If the user opens the pole display housing to make any modification, all the product warranty will be voided.

NOTE: Please refer to Posiflex Product Information CD or DVD or visit our web <http://www.posiflex.com.tw> for further information when needed.

APPENDIX

APPLICABLE COMMANDS (FOR PD-330)

EPSON COMMAND MODE (POWER ON DEFAULT):		
NAME	HEX CODES	FUNCTION
BS	<08>	Move Cursor Left
HT	<09>	Move Cursor Right
LF	<0A>	Move Cursor Down
HOM	<0B>	Move Cursor To Home Position
CLR	<0C>	Clear Display Screen
CR	<0D>	Move Cursor To Left Most Position
CAN	<18>	Clear Cursor Line
ESC =	<1B><3D><n>	Select Peripheral Device / Command Mode n=1 pass through (should not be used) n=2, 3 (not required) n=4 switch to PST command mode
ESC @	<1B><40>	Initialize Display
ESC t	<1B><74><n>	Disable / Enable Euro Dollar Sign n = 0, 19
US MD1	<1F><01>	Specify Overwrite Mode
US MD2	<1F><02>	Specify Vertical Scroll Mode
US MD3	<1F><03>	Specify Horizontal Scroll Mode
US LF	<1F><0A>	Move Cursor Up
US CR	<1F><0D>	Move Cursor To Right Most Position
US \$	<1F><24><n><m>	Move Cursor To Specified Position n = 1 ~ 20 m = 1, 2
US @	<1F><40>	Show Version
US B	<1F><42>	Move Cursor To Bottom Position
US C	<1F><43><n>	Cursor On / Off, n = 1, 0
US E	<1F><45><n>	Blink Display Screen n = 0 ~ 255

PST COMMAND MODE:	
HEX CODES	FUNCTION
<01>	Set Pass Through Flag (should not be used)
<06> <N ₁ > <N ₂ >	Change Leading Code
<14> <01>	Wraparound Mode (Default)
<14> <02>	Vertical Scroll Mode

<14> <03>	Insert Mode
<14> <04>	Overwrite Mode (Default)
<14> <08>	Back Space
<14> <09>	Move Cursor Right
<14> <0A>	Move Cursor Down
<14> <0B>	Move Cursor Left
<14> <0C>	Delete Character
<14> <0D>	Move Cursor To Left Most Position
<14> <0E>	Clear Display
<14> <10>	Clear Line 1
<14> <11>	Clear Line 2
<14> <12>	Cursor Block Mode
<14> <13>	Cursor Under Line Mode
<14> <15> <02>	Clear Pass Through Flag
<14> <16>	Switch To Epson Mode
<14> <17>	Cursor On
<14> <18>	Cursor Off
<14> <19>	Reset
<14> <1A> <P>	Move Cursor To Position P (P=0~13,14~27h)
<14> <1B>	Move Cursor To Rightmost Position Of Line 1
<14> <1C>	Move Cursor To Rightmost Position Of Line 2

The Euro Dollar Sign is designated at code <D5>h.

COMMAND CODES SUMMARY (FOR PD-2606)

Command	Function	Command	Function
ADM mode			
0C	Clear Display	10	Write Decimal Point
0D	Carriage Return	1E	Write Field 1
0E	Write Line 1	1F	Write Field 2
0F	Write Line 2		
AEDEX mode		Attention code + Function code + data + CR	
1	Display top	7	Stop trapping
2	Display bottom	8	Change attention code
4	On going scroll	9	Display whole area
6	One time scroll		
EPSON mode			
BS	Move cursor left	US ;	Mark semicolon
HT	Move cursor right	US <	Clear mark

LF	Move cursor down	US E	Set/cancel blinking
HOM	Move cursor home	US T	Set and display counter
CLR	Clear display screen	US X	Brightness adjustment
CR	Move cursor left-most	ESC %	Set/cancel user-defined char.
CAN	Clear cursor line	ESC &	Define user-defined char.
US MD1	Overwrite mode	ESC ?	Delete user-defined char.
US MD2	Vertical scroll mode	US @	Show firmware version
US MD3	Horizontal scroll mode	ESC =	Select peripheral device
US LF	Move cursor up	ESC t	Select code page table
US CR	Move cursor right-most	US B	Move cursor to bottom
US \$	Move cursor specified	ESC @	Initialize display
US ,	Mark comma	ESC R	International character set
US .	Mark period	US U	Display counter
FUTABA mode			
<i>1F</i>	Reset	<i>10 pp</i>	Digit select
<i>04 bb</i>	Brightness control	<i>13</i>	Cursor on
<i>1E pp</i>	Change code page	<i>14</i>	Cursor off
<i>1C 0i</i>	International character set	<i>08</i>	Back space
<i>05 . . . 0D</i>	Moving sign	<i>11 09</i>	Horizontal tab
<i>06 x1 x2</i>	Change leading code	<i>12 09</i>	Vertical scroll up
<i>01</i>	Set pass through flag	<i>11 0A</i>	Cursor up/down
<i>x1 x2 02</i>	Clear pass through flag	<i>12 0A</i>	Line feed
		<i>0D</i>	Carriage return
NORIRAKE mode			
<i>1B 49</i>	Reset	<i>1B 54 nn</i>	Cursor blinking Rate
<i>0E</i>	Clear	<i>15</i>	Cursor on
<i>1B 4C bb</i>	Brightness control	<i>16</i>	Cursor off
<i>1E pp</i>	Change code page	<i>08</i>	Back space

<i>1C 0i</i>	International character set	<i>11 09</i>	Horizontal tab
<i>05 . . . 0D</i>	Moving sign	<i>12 09</i>	Vertical scroll up
<i>06 x1 x2</i>	Change leading code	<i>11 0A</i>	Cursor up/down
<i>01</i>	Set pass through flag	<i>12 0A</i>	Line feed
<i>x1 x2 02</i>	Clear pass through flag	<i>0C</i>	Form feed
<i>1B 48 pp</i>	Digit select	<i>0D</i>	Carriage return
<i>1B 43 ad x1 ~ x5</i>	User defined fonts		
UTC Pass through mode Command [+data] [+CR]			
ESC uA	Top line message	ESC uH	Redefine graphic
ESC uA CR	Clear top line	ESC ulx	Display fonts
ESC uB CR	Clear bottom line	ESC uE	Set/Display time
ESC uB	Bottom line message	ESC utcEx	Change d mode
ESC uD	Continuous scrolling	ESC utcFx	Change RS mode
ESC uF	Top line scroll once	ESC RS *	Direct to pole mode
UTC Direct to pole mode			
EOT x	Brightness	DC4	Cursor off
BS	Back spacing	CAN	Clear to end of line
HT	Horizontal tab	EM	Clear to end of display
LF	Line feed	SUB x	Display fonts
CR	Carriage return	ESC d *	Pass thru mode
DLE	Display position	FS	Flashing text start
DC1	Normal display mode	GS	Flashing text end
DC2	Vertical scroll mode	RS	Clear display
DC3	Cursor on	US	Reset display

INTERNATIONAL CHARACTER SETS (FOR PD-2606)

Hex code	Country	Hex code	Country
0	USA	6	Italy
1	France	7	Spain
2	Germany	8	Japan
3	United Kingdom	9	Norway
4	Denmark I	A	Denmark II
5	Sweden	B	Ex-Yugoslavia

